

FIRESURE FM AND LPC TYPE FLOWMETERS**Firesure Duo - Flange Flowmeter**

LPCB & FM Approvals for Sprinkler Fire Pump Testing

SINGLE combined dm^3 / min and US GPM tube

- Suitable for LPC and FM installations.
- Stable easy to read flow indication.

ISOLATION VALVES at inlet & outlet to indicator

- Provides a permanent, safe and secure installation.
- Allows isolation from main pipe eliminating shocks at pump start up.
- Air is automatically vented when valves are opened.

Horizontal, inclined & vertical WAFER FLANGE connection


- Flexibility in design & site positioning.
- Compact and simple installation.

SKU: N/A | Categories: [Fire Sprinkler System](#) | Tags: [Fire Sprinkler System](#)



VARIATIONS

Image SKU Price Stock Status Stock Quantity Description Part No.

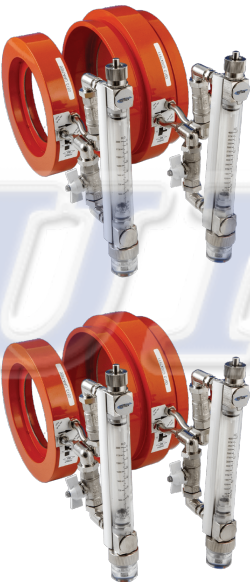


DUO F450[®]

DUO F1000

PRODUCT DESCRIPTION

TECHNICAL DATA								
Pipe OD	Nominal		Meter Code	Flow Test Ranges		Pump Duty	LPC Approval	FM Approval
	mm	mm Inches		LPCB	FM			
				dm ³ / min	US GPM	US GPM	Ref.	Ref. FS
60.3	50	2	LF100*	150 -700		100	464a/01	
88.9	80	3	DUO F200	300 - 1600	100 - 400	150; 200	464a/02	80FLFM

114.3	100	4	DUO F450	500 – 3500	150 – 900	250; 300; 450	464a/03	100FLFM
165.1 / 168.3	150	6	DUO F1000	900 – 7900	250 – 2000	500; 750; 1000	464a/04	150FLFM
219.1	200	8	DUO F2000	2000 – 15000	750 – 4000	1250; 1500; 2000	464a/05	200FLFM

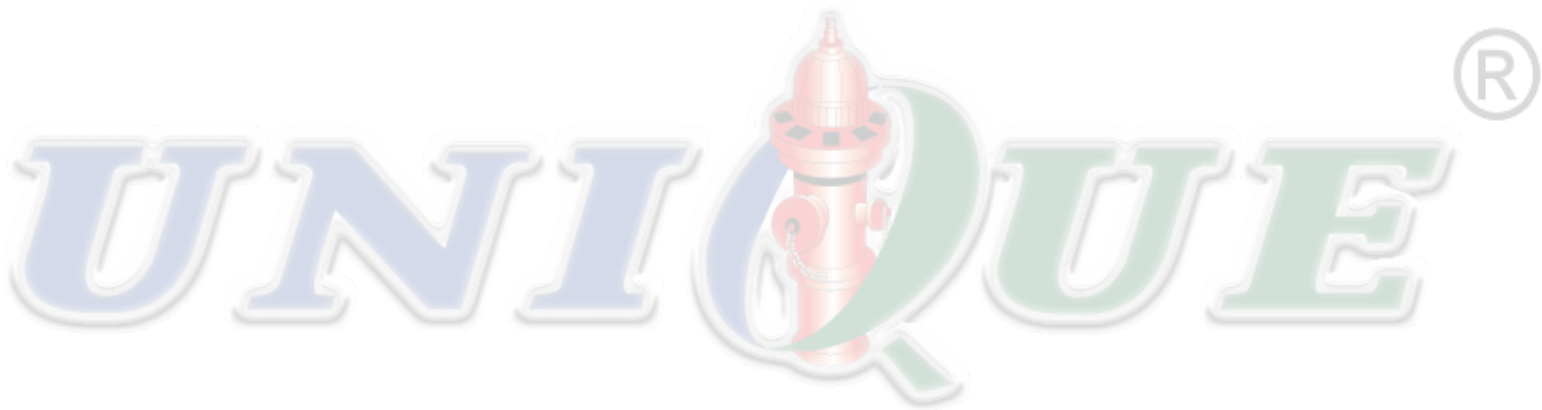

ADDITIONAL INFORMATION

Part No. DUO F450, DUO F1000

